

FIG. 1 is an exploded perspective view of a mechanical assembly. The assembly includes a base component 10 with internal features 11, 12, 13, 14, 15, 16, and 17. A vertical rod 18 passes through the base. A bracket 20 is positioned to the right, with a pin 21 and a component 22. A lever 23 with a pin 231 is shown below the bracket. A plate 25 with a pin 251 is positioned above the base. A component 26 is also shown. A bracket 27 with a pin 29 is positioned above the plate. A component 28 is shown to the right of the bracket 27. A large bracket 30 is at the top, with various pins and components labeled 31, 32, 33, 34, 35, 36, 37, and 372. A pin 38 is shown to the left of the base.

FIG.1

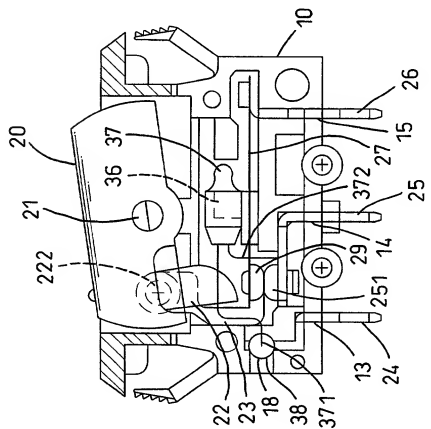


FIG. 2

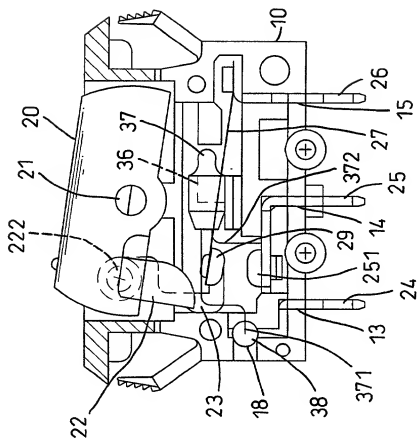


FIG. 3

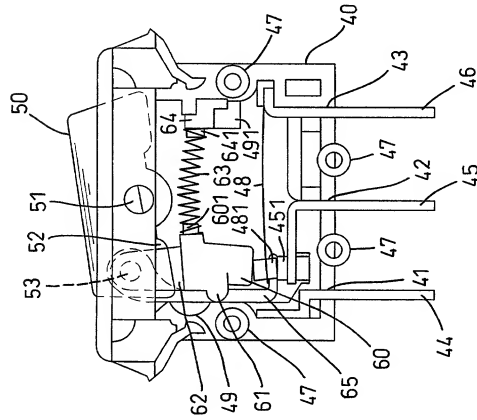


FIG. 4
PRIOR ART

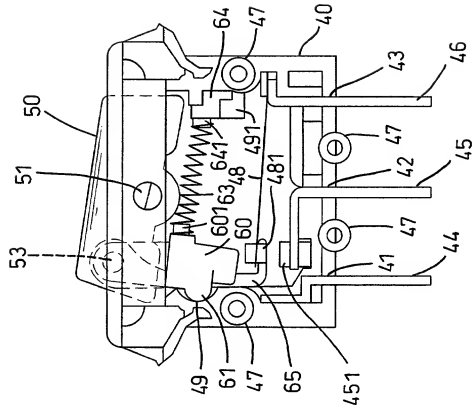


FIG. 5
PRIOR ART